



# X66S6/S

## One-Phase, 60Hz@1800RPM



### Genset Specification

Genset Model	Prime Power		Standby Power		Structure Type	Amps(A)			dBA @7m	Engine Model	Alternator Model	Dimension L x W x H (mm)	Weight (kg)	Tank (L)
	kVA	kW	kVA	kW		220V	230V	240V						
X66S6	73	58	79	63	A	329.5	315.2	302.1	89.5	4BTA3.9-G2	UCI274D	1842 x 890 x 1429	941	232
X66S6S	73	58	79	63	R	329.5	315.2	302.1	69.5	4BTA3.9-G2	UCI274D	2688 x 1080 x 1709	1526	270

### Engine Specification


Engine Model	Output Power (kw)		Cyl.	Gov.	Asp.	Displacement(L)	Cons (L/h)			Total Lubrication Capacity (L)	Total Coolant Capacity (L)
	Prime	Standby					100%	75%	50%		
4BTA3.9-G2	50	55	4L	E	TW	3.9	13.1	9.8	6.7	10.9	7.9

### Configuration

	Genset Model	X66S6	X66S6S	
Engine	4-Stroke Water-cooled Diesel Engine	●	●	
	Industrial Silencer	●	●	
	Switch in the Negative Pole	●	●	
	Oil Sump Pump	●	●	
	Water Jacket Preheater220/240V	○	○	
	Oil Preheater	○	○	
	Standard Air Filter	●	●	
Alternator	PMG	○	○	
	Anti-condensing Heater	○	○	
	Winding Temperature Measuring Instrument	○	○	
	Single Bearing,Class Hinsulation ,IP23	●	●	
	Alternator Preheater	○	○	
	AVR	●	●	
Cooling Systems	Radiator for 45°C	●	●	
	Coolant Integrated with Genset	●	●	
	Coolant Protection Port	●	●	
	Shelter of Water Tank	●	●	
Starting Systems	Start-up and Charging	●	●	
	Batteries with Cables and Switch	●	●	
	Protecting Jacket of Solenoid Terminal	●	●	
Control Systems	Battery Charger	●	●	
	Key Start	●	●	
	AMF	○	○	
	Paralleling	×	×	
Fuel Systems	Breather Valve	●	●	
	Fuel Level Sensor	●	●	
	Fuel T-valves	○	○	
	Canopy and Soundproof Configuration	Outside Refueling	×	●
		Outside Watering	×	●
		Rain Hat of Hush Pipe	×	●
Lifting Lugs		×	●	
Shock Absorbers		●	●	
Emergency Stop Button Outlaid		●	●	
Bases	Controls Cabinet with Windows and Doors	×	●	
	Air Inlet	×	●	
	Air Outlet	×	●	
	Silencer	●	●	
	Base Fuel Tank	●	●	
	Holes for Forklift	×	●	
Materials with Gensets	Pulling Slots	●	●	
	Wiring Hole	●	●	
	Earthed Protection	●	●	
	Drain Outlet	●	●	
Materials with Gensets	Parts Manual	●	●	
	Operation Manual	●	●	
	Warranty Manual	●	●	
	Records Notebook of Maintenance	●	●	

Standard: ● Optional: ○ Impossible: ×

### Color & Size (mm)

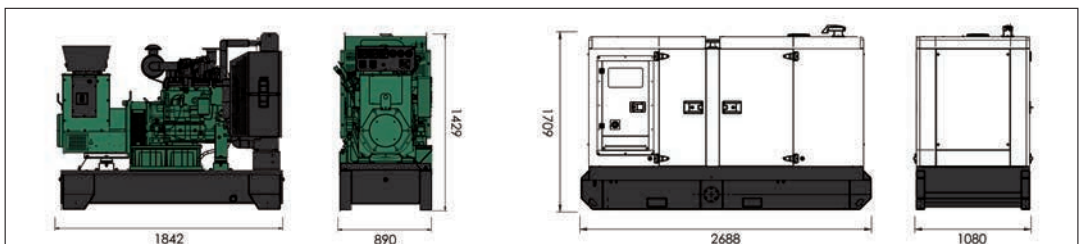

Also available in the following voltages: 220V , 230V , 240V. (2) The weights are approximate and without fuel; \*Ambient reference conditions: 1,000 mbar, 27°C, 30% relative humidity. Rating according to ISO 3046 and 8528.