



X22S6S

One-Phase, 60Hz@1800RPM



Genset Specification

Genset Model	Prime Power		Standby Power		Structure Type	Amps(A)	dBA @7m	Engine Model	Alternator Model	Dimension L x W x H (mm)	Weight (kg)	Tank (L)
	kVA	kW	kVA	kW								
X22S6S	25	20	29	23.2	Soundproof R	113.6 108.8 104.1	N/A	V2203-BG	PI144J	2242 x 1040 x 1347	1040	140

Engine Specification

Engine Model	Output Power (kw)	Cyl.	Gov.	Asp.	Displacement(L)	100%Cons (L/h)	Total Lubrication Capacity (L)	Total Coolant Capacity (L)
V2203-BG	24.2	4L	M	NA	2.2	4	9.7	8


Configuration

	Genset Model	X22S6S
Engine	4-Stroke Water-cooled Diesel Engine	●
	Industrial Silencer	●
	Switch in the Negative Pole	●
	Oil Sump Pump	●
	Water Jacket Preheater220/240V	○
	Oil Preheater	○
Alternator	Standard Air Filter	●
	PMG	○
	Anti-condensing Heater	○
	Winding Temperature Measuring Instrument	○
	Single Bearing,Class Hinsulation,IP23	●
	Alternator Preheater	○
Cooling Systems	AVR	●
	Radiator for 45°C	●
	Coolant Integrated with Genset	●
	Coolant Protection Port	●
Starting Systems	Shelter of Water Tank	●
	Start-up and Charging	●
	Batteries with Cables and Switch	●
Control Systems	Protecting Jacket of Solenoid Terminal	●
	Battery Charger	●
	Key Start	●
	AMF	○
	Paralleling	×

	Genset Model	X22S6S
Fuel Systems	Breather Valve	●
	Fuel Level Sensor	●
	Fuel T-valves	○
Canopy and Soundproof Configuration	Outside Refueling	×
	Outside Watering	×
	Rain Hat of Hush Pipe	×
	Lifting Lugs	×
	Shock Absorbers	●
	Emergency Stop Button Outlaid	●
	Controls Cabinet with Windows and Doors	×
	Air Inlet	×
Air Outlet	×	
Bases	Silencer	●
	Base Fuel Tank	●
	Holes for Forklift	×
	Pulling Slots	●
	Wiring Hole	●
	Earthed Protection	●
Materials with Gensets	Drain Outlet	●
	Parts Manual	●
	Operation Manual	●
	Warranty Manual	●
	Records Notebook of Maintenance	●

Standard: ● Optional: ○ Impossible: ×

Color & Size (mm)

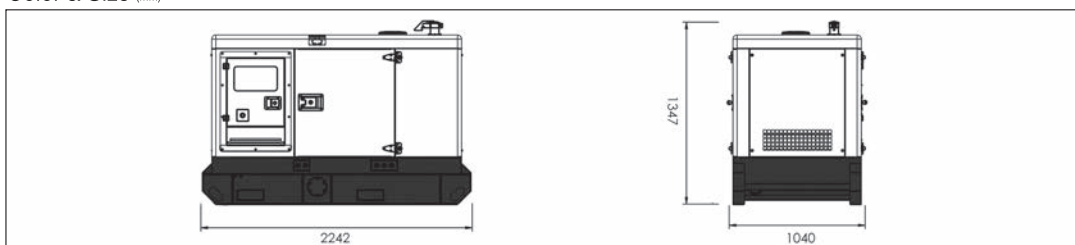

Also available in the following voltages: 220V , 230V, 240V; (2) The weights are approximate and without fuel; *Ambient reference conditions: 1,000 mbar, 27°C, 30% relative humidity. Rating according to ISO 3046 and 8528.